

PROYECTORES LUXILUM


LUXILUM FLOODLIGHTS




MODELOS PROYECTORES LED-CHIP




Model- Modelo	FY015		Intensity of illumination Intensidad de iluminación	
Power - Potencia	10W		Distance	LUX
IP	IP65			
Input - Watage	AC100-240V (50/60Hz)		3M	45.5
Angle - Angulo	100°			
CCT	WW (3000K) /NW (4000K) /PW (6000K)		9M	4.6
LM	WW:850LM/NW:900LM/PW:950LM			
CRI	>90		15M	1.6

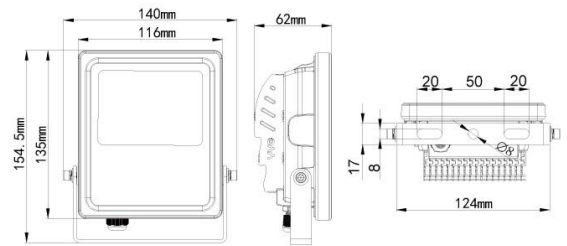


Model- Modelo	FY025		Intensity of illumination Intensidad de iluminación	
Power - Potencia	20W		Distance	LUX
IP	IP65			
Input - Watage	AC100-240V (50/60Hz)		3M	87
Angle - Angulo	100°			
CCT	WW (3000K) /NW (4000K) /PW (6000K)		9M	9.6
LM	WW:1700LM/NW:1800LM/PW:1900LM			
CRI	>90		15M	3.5

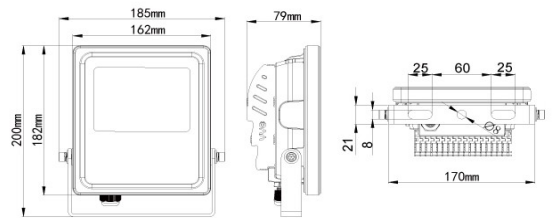


Model- Modelo	FY035		Intensity of illumination Intensidad de iluminación	
Power - Potencia	30W		Distance	LUX
IP	IP65			
Input - Watage	AC100-240V (50/60Hz)		3M	128.3
Angle - Angulo	100°			
CCT	WW (3000K) /NW (4000K) /PW (6000K)		9M	14.2
LM	WW:2550LM/NW:2700LM/PW:2850LM			
CRI	>90		15M	5.1

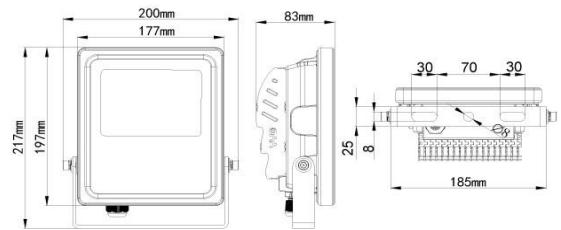


Model- Modelo	FY075		Intensity of illumination Intensidad de iluminación	
Power - Potencia	70W		Distance	LUX
IP	IP65			
Input - Watage	AC100-240V (50/60Hz)		3M	264.9
Angle - Angulo	100°			
CCT	WW (3000K) /NW (4000K) /PW (6000K)		9M	29.4
LM	WW:6300LM/NW:6650LM/PW:7000LM			
CRI	>90		15M	10.6

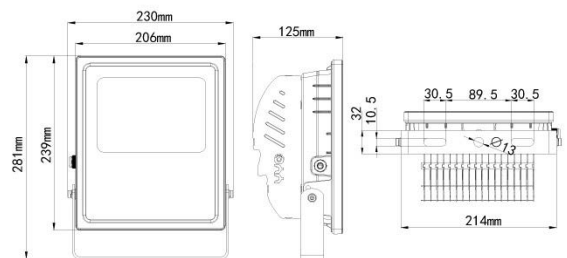



Model- Modelo	FY105		Intensity of illumination Intensidad de iluminación	
Power - Potencia	100W		Distance	LUX
IP	IP65			
Input - Watage	AC100-240V (50/60Hz)			
Angle - Angulo	100°			
CCT	WW (3000K) /NW (4000K) /PW (6000K)		3M	386.1
LM	WW:9000LM/NW:9500LM/PW:10000LM		9M	42.9
CRI	>90		15M	15.4

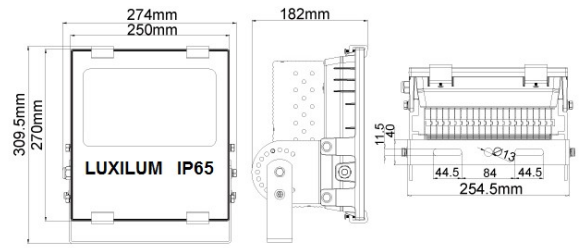

Model- Modelo	FY155		Intensity of illumination Intensidad de iluminación	
Power - Potencia	150W		Distance	LUX
IP	IP65			
Input - Watage	AC100-240V (50/60Hz)			
Angle - Angulo	100°			
CCT	WW (3000K) /NW (4000K) /PW (6000K)		3M	567.5
LM	WW:13500LM/NW:14250LM/PW:15000LM		9M	141.9
CRI	>90		15M	22.7

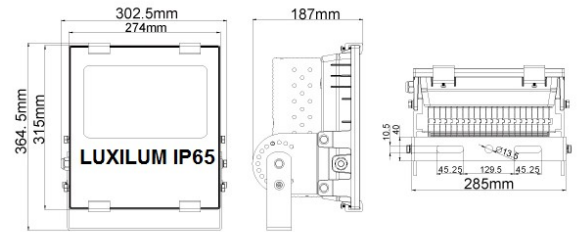

Model- Modelo	FY205		Intensity of illumination Intensidad de iluminación	
Power - Potencia	200W		Distance	LUX
IP	IP65			
Input - Watage	AC100-240V (50/60Hz)			
Angle - Angulo	100°			
CCT	WW (3000K) /NW (4000K) /PW (6000K)		3M	746.7
LM	WW:18000LM/NW:19000LM/PW:20000LM		9M	82.9
CRI	>90		15M	29.8

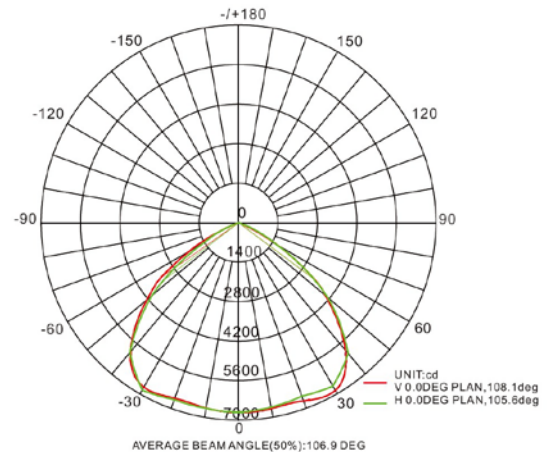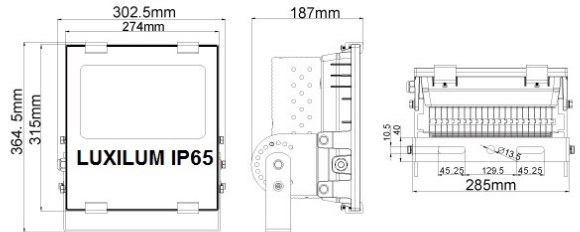

CONTACTENOS

www.imexter.com / ventas@imexter.com

809-563-7158 / 809-263-7643 C/FANTINO FALCO #47, APTO 902. TORRE NACO 2000, ENS. NACO, DISTRITO NACIONAL. R.D

